

**ED INDUSTRIAL  
LIGHTS**

**INTL400**

**TL-400**

Deployable portable lighting in one  
bespoke robust package.

**Portable  
Light Tower**



# SPEEDY DEPLOYMENT

---

## MULTIPLE LIGHTING DISTRIBUTION



**Single latch to release tripod**


Deploy or fold in seconds.





### Self-locking Pole


Drag & Lock at any position, contraction in one push.



Press down to fold the pole




180°



180°



330°



360°

up/ down/ left/ right adjustable

In built damping mechanism for ease of adjustment to cover lighting area required.





# Ultra-long Endurance

Standard Mode Up To  
(3xD24-100)

20+ Hours


## Control Board

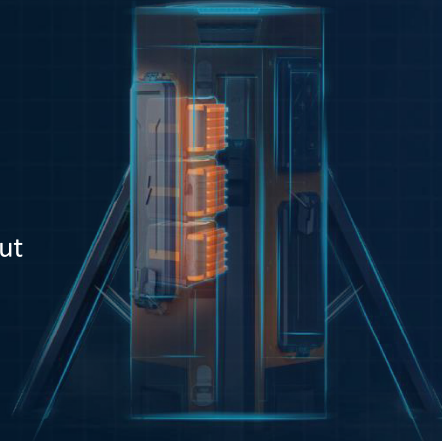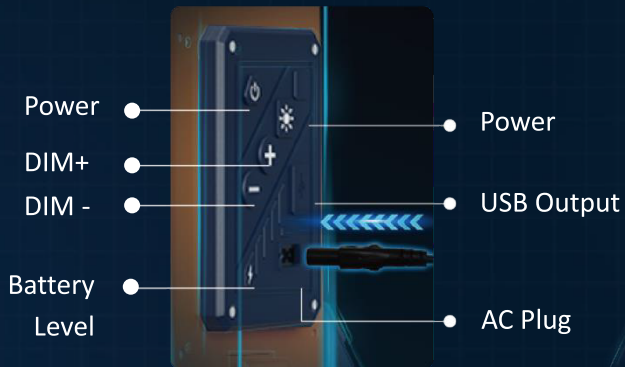


## Application



Emergency




Infrastructu



Railway



Eventre



Maintenance



Mining



Sport




Construction



AC Powered  
Up To **15,000** LM

Battery-powered  
Up To **8,000** LM

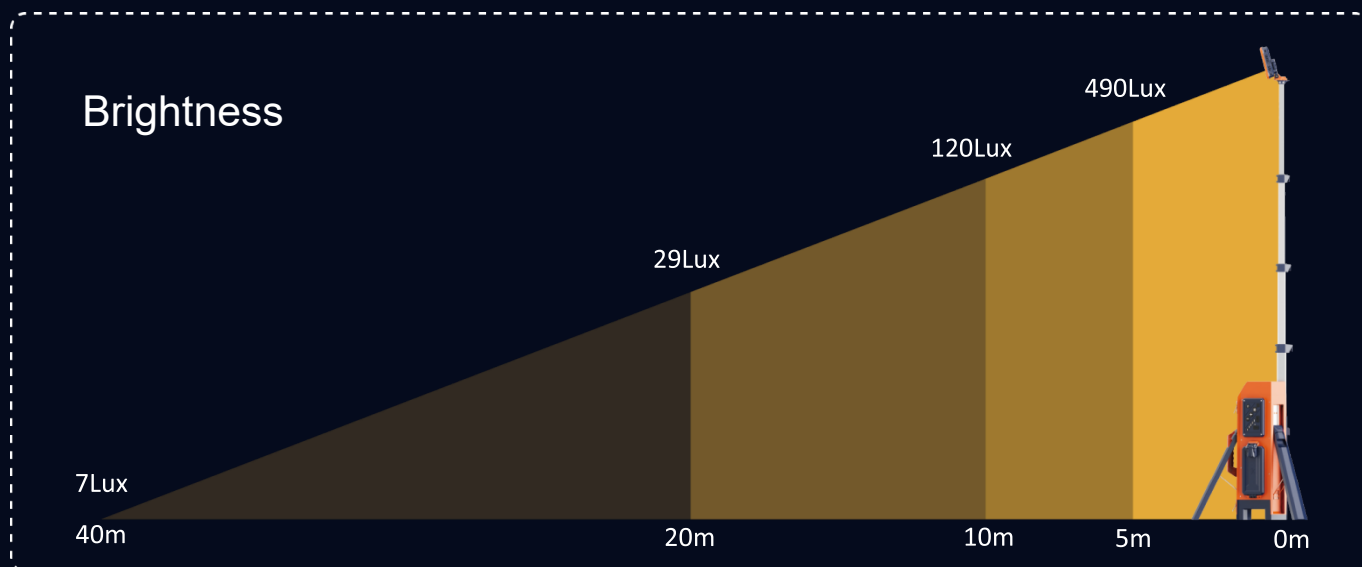

\* 'Brightness' represents the center point illuminance value of the lighting direction.

AC	0-15,000LM Stepless Dimmable	
Battery (4 Mode)	Turbo	8,000LM
	Standard	5,000LM
	Balanced	3,000LM
	Eco	800L





## One-person Operation

Transport, deploy, adjust lighting in seconds with one operator.



Dual handle & strap available, 10Kg.



# Optional Accessories

## 9 Bay Simultaneous Rapid Charger (TKC-9)

Carry 9 battery packs, charge them for off-grid light tower operation for up to a week.



Achieve 15000LM full brightness with the driver, or operate wirelessly using a battery and charger.

Cover all possibilities with a choice of Power Options.

Battery(D24 Series)

Charger (MC-2)

Driver  
(X1-75-56BH)

Charger (MC -1)

S3 Flash Light

T2 Head Light

TL400 is a main light source that doubles as a USB charger for T2 headlamps, S3 flashlights, and mobile devices.

Fully equipped for any challenges in the dark!



# Specifications


## TL-400

Hight	64.5cm~220cm
Weight	10Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	0 - 15,000Lm
Run Times	>20 hours (Standard mode, D24-100)
IP Grade	IP65
Output(USB)	5V 2A (2 Dock)
Battery System	D24-100

## Battery (D24-100)


Rated Power	98Wh
Rated Voltage	24.5V
Rated Capacity	4.0Ah
Working Temperture	-10~50℃
Working Humidity	1~98%

# Size (mm)

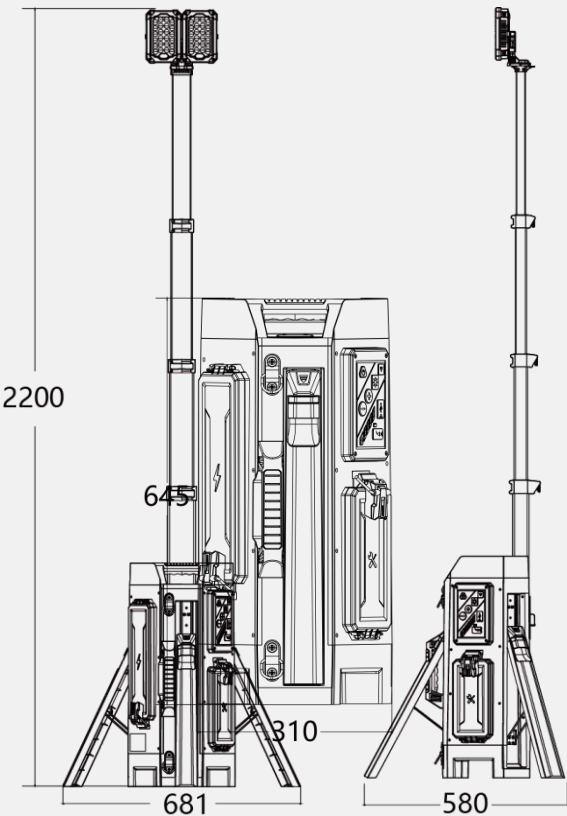

# Package

Size of Carton	Gross Weight of Carton	PCS/Carton
730x390x410mm	13.3kg $\pm$ 5%	1

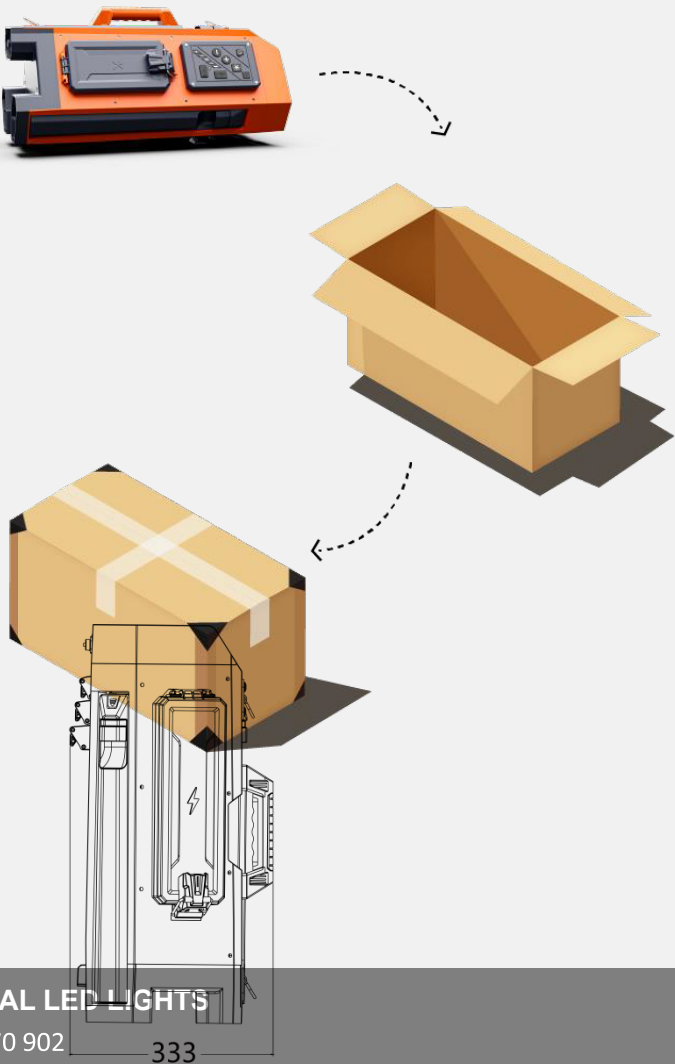

## INDUSTRIAL LED LIGHTS

Tel: 0431 170 902  
Web: <https://industrialledlightsonline.com.au/>  
E-mail: [sales@industrialledlightsonline.com.au](mailto:sales@industrialledlightsonline.com.au)  
Add: INGLEBURN NSW, AUSTRALIA